

Inumbrina


© design by Dirk Wynants

ø250
ø320
ø380
Parasol foot for floor fastening
Concrete (wheel) base


Parasol foot
In combination with
Gargantua, Pantagruel,
Abachus & Anker




Inumbrina




Dimensions (mm)	ø	H	h_1	h_2
Inumbrina ø250	2512	2501	2035	1199
Inumbrina ø320	3222	2501	2016	844
Inumbrina ø380	3786	2792	2145	

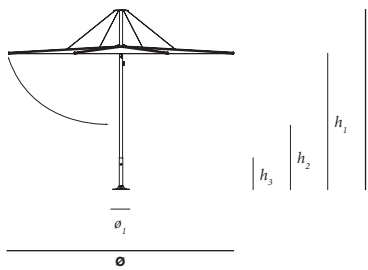


Dimensions (mm)	ø	H	ϕ_1	h_1	h_2	h_3
Inumbrina ø250 with floor fastening	2512	2501	100	2035	1199	280
Inumbrina ø320 with floor fastening	3222	2501	100	2016	844	280
Inumbrina ø380 with floor fastening	3786	2792	250	2145	793	490

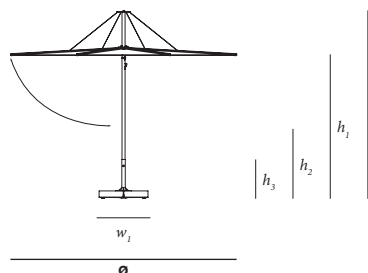

Dimensions (mm)	ø	H	w_1	h_1	h_2	h_3
Inumbrina ø380 on concrete base	3786	2904	760	2257	904	602
Inumbrina ø380 on concrete wheel base	3786	2982	824	2918	983	680



Dimensions (mm)	ø	H	ϕ_1	h_1	h_2	h_3
Inumbrina ø250 with parasol foot	2512	2509	725	2043	1207	288
Inumbrina ø320 with parasol foot	3222	2509	725	2024	852	288




Dimensions (mm)	ø	H	h_1	h_2
Inumbrina ø250 with Abachus	2512	2501	2035	1199



extremis®

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. **All dimensions are in mm**, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.

Tech sheet
20190125




Dimensions (mm)	ø	H	h ₁	h ₂
Inumbrina ø320 with Anker	2512	2501	2035	844



Dimensions (mm)	ø	H	h ₁	h ₂
Inumbrina ø380 with Gargantua	3786	2792	2145	793
Inumbrina ø380 with Pantagruel	3786	2792	2145	793

BOX 1: INUMBRINA + COVER



BOX 2: 1 CONCRETE BLOCK



BOX 3: FRAME FOR CONCRETE BASE




BOX 4: FRAME FOR CONCRETE WHEEL BASE




BOX 5: PARASOL BASE POLE



Box dimensions (mm)		L	W	H	Qty (#)	Volume (m ³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Inumbrina ø250	Box 1	2650	260	290	1	0,20	17,50	13,60	3,90
Inumbrina ø320	Box 1	2650	260	290	1	0,20	20,20	16,30	3,90
Inumbrina ø380	Box 1	2830	260	290	1	0,21	27,25	23,00	4,25
Steel disc plate (parasol foot)	Box 4	760	760	33	1	0,02	28,50	25,50	3,00
Floor fastening ø380	Box 5	510	390	320	1	0,06	4,00	3,30	0,70
Floor fastening ø250/ø320	Box 5	450	150	90	1	0,01	1,40	1,20	0,20
Concrete base	Box 2	376	376	100	4	0,06	120,00	114,00	6,00
	Box 3	720	310	130	1	0,03	7,20	6,50	0,70
	Box 5	510	390	320	1	0,06	4,00	3,30	0,70
					total	0,15	131,20	123,80	7,40
Concrete wheel base	Box 2	376	376	100	4	0,06	120,00	114,00	6,00
	Box 4	850	850	150	1	0,11	22,40	21,00	1,40
	Box 5	510	390	320	1	0,06	4,00	3,30	0,70
					total:	0,23	146,40	138,30	8,10



Dimensions (mm)	ø	H	ø ₁	l ₁	l ₂
Floor fastening for ø380	250	490	11	106	106
Floor fastening for ø250 & ø320	250	280	11	106	106



Materials & colours



Parasol fabric



High-tech polyester*

Parasol foot



Structured powder-coating*

*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV colour fastness	Flame retarding
		mm	micron					
High-tech polyester fabric	<ul style="list-style-type: none"> High UV resistance and ultra strong Low weight / high tear strength Long-term appearance 	0,37	n.a.	250 g/m ²	Outdoor	The fabric has a water column of 350 mm (EN 20811)	7/8 (ISO 105-B02)	/
Stainless steel parasol foot for floor fastening	<ul style="list-style-type: none"> High rust resistance Periodical maintenance required 	2 - 5	n.a.	8,00 10 ³ kg/m ³	Outdoor	n.a.	Very good	NEN-EN13501-1 A1 *
Concrete base	<ul style="list-style-type: none"> Made under high pressure Matt and porous 	100	n.a.	2,10 10 ³ kg/m ³	Outdoor	n.a.	Very good	NEN-EN13501-1 A1 *
Hot dip galvanised steel base for concrete (wheel) base	<ul style="list-style-type: none"> Most durable method for protecting metal from rusting Protective layer Very long life span 100% recyclable Cradle to Cradle Certified™ 	2 - 10	50 - 100	7,50 10 ³ kg/m ³	Outdoor	n.a.	Very good, galvanisation will however become less shiny when used outdoors	NEN-EN13501-1 A1 *
Structured powder-coated steel base	<ul style="list-style-type: none"> Consists of natural minerals bonded by acrylics Long-life Resistant to impact, stains and discolouration Non-flammable Very easy to clean and maintain 	8	50 - 100	7,70 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN13501-1 A2-s1 **
Cover	<ul style="list-style-type: none"> 100% polyester Polyuréthane coating Breathable, so not 100% water-proof 	0,50	n.a.	240 g/m ²	Outdoor	Water repellent & breathable	6-8/8 (ISO 105-B02)	/

* NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

** NEN-EN13501-1 A2-s1

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

Class A - class 1 (UBC 8-1)

Californian standard.

Warnings

General

- Do not use any sharp tools to open the packaging.
- We strongly advise against using power tools.
- Tripping hazard, mind your step.
- Do not put out cigarettes on the parasol.
- Not graffiti proof.
- Risk of suffocation in plastic bags.
- Colours can differ over years and from batch to batch.

Product

- Anchoring the product has to be done by qualified people.
- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- If you hear the cables whistling due to heavy wind or if you are not using the parasol, close it and use the cover to avoid the parasol from opening or getting dirty.
- For ventilation purposes, the cover is not 100% waterproof.
- Ask for assistance when closing the parasol in strong winds. Opposite the wind's direction, at least one person needs to guide the parasol's spines downwards in order to avoid the parasol from blowing open fiercely halfway

down.

- Store the parasol when not in use for a long time as follows: vertically, completely dry and in a dry environment.
- Do not leave closed if not completely dry. Do not leave the parasol closed for a long time when the parasol fabric is still damp or wet.
- Do not leave the parasol unattended when opened.
- The fabric can be removed for washing but we do not advise this. In the first place, you should close the parasol when you do not use it and protect it with its cover. This protects the parasol from getting dirty.
- Tests in a wind tunnel have shown that the parasol withstands wind speeds up to 8 on the Beaufort scale (when anchored to the floor). Still, it is best to close it sooner (from wind speed 6 is the rule of thumb).

High-tech polyester

- Shake or brush off loose dirt immediately.
- Do not use any aggressive detergents as they will remove the protective coating of the fabric.
- We strongly advise you not to use a high-pressure hose for cleaning.

Stainless steel

- Very good UV colour fastness.
- Flame retarding: NEN-EN13501-1 A1 - Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- Watch out, stainless steel isn't entirely rustproof! Be sure to avoid contact with iron objects. If it does show signs of rust, clean with rust remover as quickly as possible.

Concrete

- Matt and porous.
- Very good UV colour fastness.
- Flame retarding: NEN-EN13501-1 A1 - Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

Applications

Residential: fixed to the ground, fixed steel plate, on a (wheel) base, on a Gargantua, Pantagruel picnic, Abachus, Anker or Virus.

Instructions

1. Remove cover.
2. To open the parasol, firmly pull the rope until the parasol fabric is almost completely horizontal.
3. To put the rope in the tube, you should fold it in 2 and put the loop in the hole until it is completely tucked away.
4. To close the parasol again, take the rope out of the tube and hold it in a slight angle. Tip: keep the rope aslope until the parasol is completely closed.

F.a.q.

Q: Is the fabric 100% waterproof?

A: With light rain fall you can stay seated under the parasol. The fabric is slightly slanted in opened position. With heavy rain fall, the canvas lets through a little bit of water. This is typical for the fabric and necessary, because the fabric should be able to ventilate.

Q: Can you remove the fabric for washing?

A: We do not advise this but it is possible. In the first place, you should close the parasol when you do not use it and protect it with its cover. This protects the parasol from getting dirty.

Q: How resistant is the parasol?

A: Tests in a wind tunnel have shown that the parasol withstands wind speeds up to 8 on the Beaufort scale. Still, it is best to close it sooner (from wind speed 6 is the rule of thumb).

Q: Do you need to use a parasol cover?

A: Using a cover is strongly recommended for use in most climates around the world. Protect your parasol from polluted rain, bird droppings, dust and heavy winds to avoid marks or stains on the parasol fabric.

Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

PARASOL FABRIC

- Shake or brush off loose dirt immediately.
- Spray Extremis Multi Cleaner.
- Use a soft brush and make circular movements.
- Let the suds soak in for a moment.
- Rinse thoroughly to remove all soap residue.
- Simply allow to dry.

STAINLESS STEEL

- Clean regularly with a dry cloth and some stainless steel cleaner.

Floor fastening

Inumbrina comes with an optional floor anchoring set.



Good to know

- The diameter of the pole of the Inumbrina 380 is $\varnothing 48$ mm. The diameter of the pole of the Inumbrina 250 & 320 is $\varnothing 35$ mm.
- Inumbrina combines perfectly with the Gargantua, Pantagruel picnic, Abachus, Anker & Virus table.



Website

www.extremis.com/inumbrina